


Lightning Your Dreams

COMMERCIAL ARCHITECTURAL SMART LIGHTING

COMPLETE SOLUTION FOR

LED LIGHTS

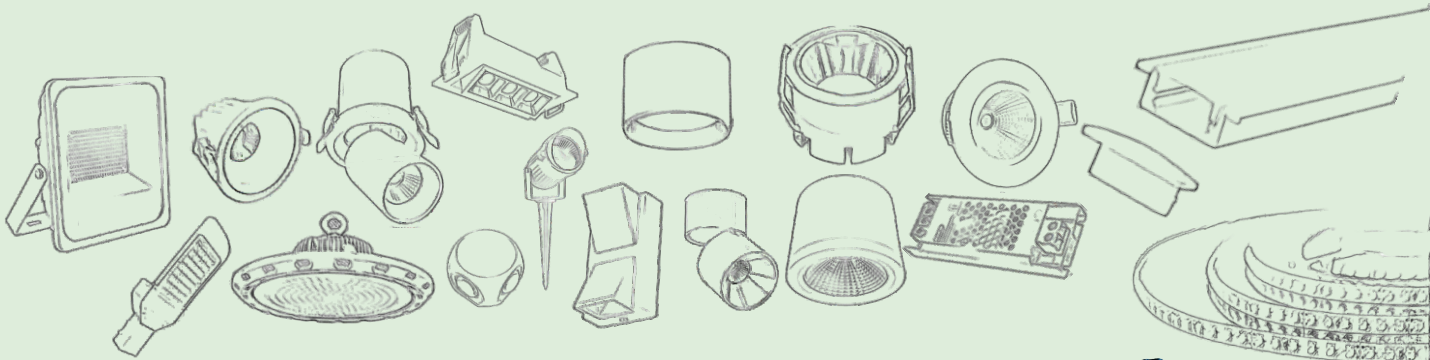

Powered By

PHILIPS **FULHAM** **CREE** **bridgelux** **OSRAM**



Profile

VIVID was formed in the year 2018 to deliver a complete package of lighting solutions with latest designs and technology that serve all your specific needs. Our products offer diverse applications like architecture, home lightings, commercial lightings, outdoor lightings and many more, enhancing one's lifestyle.

Mission

The mission of VIVID LED SOLUTIONS is to deliver high quality products and services which are true to its description and to the satisfaction of our customers.

We offer an exceptionally strong portfolio of quality products and services, encompassing a comprehensive selection to meet a wide variety of lighting industry. At the core of our Design, is the commitment to utilize the latest technologies that improve our performance, quality, efficiency and improve the environmental conditions through reduced energy consumption.

Our Clients



Contents

Cob Lights



1-10

Down Lights




11-12

Linear Cob Lights



13-16

Gimbal Lights



17-18

Surface Lights



19-21

Focus Lights




22-23

Track Lights



24-25

Linear Lights




26-27

2X2 Pannel



28

Strip Lights & SMPS

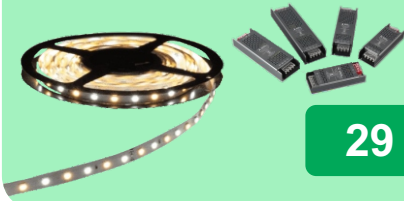

29

Alluminium & Silicon Profiles



29-32

Ultra Thin Magnetic Track Lights



33-36

Magnetic Track Lights



37-39

Wall Elevation & Steps Lights



40-41

Garden Lights



42

Highbay Lights



43

Flood Lights



44

Street Lights



45




Lightning Your Dreams

A Leap into Digitally Connected Lighting world

It is a app based lighting technology which facilitates inter-connection of lighting fixtures through internet and transforms the way we light our dreams. You will fall in love with our user friendly mobile app and its smart lighting system which is designed to give a “connected” lighting experience in complete sync with your lighting mood and the required ambience. It also ensures better energy efficiency and ease of use. This may include high efficiency fixtures and automated controls to turn on or dim the lights without leaving your sofa or change the mood by switching from Warm to cool light.

(Tune from 2700k – 6500k).

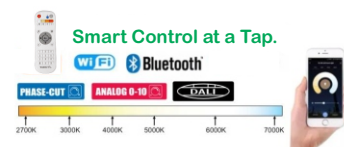

App Control



Energy Efficient




Bluetooth low energy mesh



Create your own Ambience

LED
Cob Lights

VIVID
Lightning Your Dreams

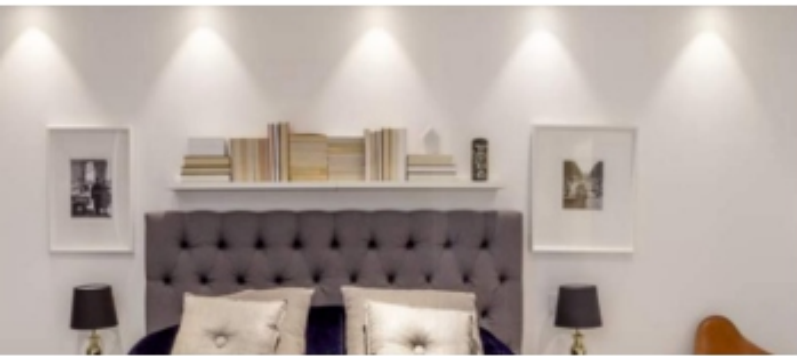

DELTA - R



WATTAGE	8-10W	12-15W	18-20W	28-30W
DIAMETER	59MM	82MM	95MM	115MM
HEIGHT	69MM	79MM	100MM	120MM
CUTOUT	50MM	74MM	85MM	105MM

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 40°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 RING COLOUR  

DELTA - RF



WATTAGE	8-10W	12-15W	18-20W	28-30W
DIAMETER	59MM	82MM	95MM	115MM
HEIGHT	69MM	79MM	100MM	120MM
CUTOUT	50MM	74MM	85MM	105MM


LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 40°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 RING COLOUR      

DELTA - ARC



WATTAGE	3-4W	6-8W	10-12W	12-15W	15-20W	22-30W	36-40W	40-50W
DIAMETER	56mm	74mm	81mm	89mm	114mm	137mm	155mm	155mm
HEIGHT	38mm	55mm	54mm	55mm	79mm	79mm	84mm	84mm
CUT OUT	48mm	64mm	70mm	79mm	104mm	125mm	145mm	145mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 4000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 36° / 60°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING



DZIRE



WATTAGE	8-10W	12-15W	18-20W
DIAMETER	65mm	75mm	90mm
HEIGHT	45mm	55mm	90mm
CUTOUT	55mm	65mm	85mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 40°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 RING COLOUR  Gun Metal

RIO FRONT OPENABLE



WATTAGE	12-15W
DIAMETER	85mm
HEIGHT	70mm
CUTOUT	75mm


LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 40°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING

ATOM-D



WATTAGE	8-10W	12-15W	18-20W
DIAMETER	70mm	85mm	100mm
HEIGHT	60mm	80mm	95mm
CUTOUT	50mm	75mm	85mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 36°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 RING COLOUR  Matt Black



DELTA - ARC PLUS



WATTAGE	8-10W	12-15W	18-20W	25-30W	40-50W
DIAMETER	102mm	102mm	125mm	148mm	170mm
HEIGHT	58mm	70mm	70mm	85mm	85mm
CUTOUT	86mm	86mm	110mm	132mm	154mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 4000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 36° / 60°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING


GLORIA-RF



WATTAGE	8-10W	12-15W	18-20W	28-30W
DIAMETER	59MM	82MM	95MM	115MM
HEIGHT	69MM	79MM	100MM	120MM
CUTOUT	50MM	74MM	85MM	105MM


LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 40°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 RING COLOUR 

CURVE MINI

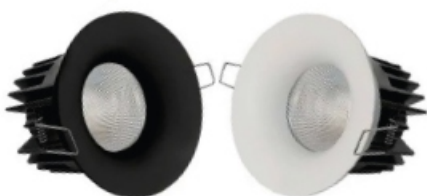

WATTAGE	3W	7W	12W	18W
DIAMETER	46mm	75mm	85mm	95mm
HEIGHT	44mm	57mm	65mm	82mm
CUTOUT	39mm	65mm	75mm	85mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 4000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 36° / 60°



FLORA



WATTAGE	8-10W	12-15W	18-20W
DIAMETER	70mm	83mm	90mm
HEIGHT	60mm	75mm	85mm
CUTOUT	65mm	75mm	85mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 40°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 RING COLOUR  

JAZZ



WATTAGE	8-10W	12-15W	18-20W
DIAMETER	62mm	85mm	105mm
HEIGHT	58mm	62mm	75mm
CUTOUT	55mm	75mm	95mm


LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 40°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 RING COLOUR      

BEAT



WATTAGE	8-10W	12-15W	18-20W
DIAMETER	70mm	85mm	100mm
HEIGHT	50mm	60mm	70mm
CUTOUT	55mm	75mm	90mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 60°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 RING COLOUR  



GLANZA FRONT OPENABLE



WATTAGE	5-8W	12-15W	18-20W	28-30W
DIAMETER	65mm	85mm	105mm	105mm
HEIGHT	78mm	101mm	110mm	121mm
CUTOUT	55mm	75mm	95mm	95mm



LED DRIVER **CREE** / **bridgelux**
FULHAM / **PHILIPS** / **OSRAM**

COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K

LUMEN EFFICIENCY 120-140 LM / W

LED BEAM ANGLE 15° / 24° / 36° / 55°

CRI 90 / 95

MATERIAL ALUMINUM DIE CASTING

RING COLOUR



GLANZA TRIMLESS



WATTAGE	5-8W	12-15W	18-20W	28-30W
DIAMETER	88mm	108mm	128mm	128mm
HEIGHT	78mm	101mm	110mm	121mm
CUTOUT	55mm	75mm	95mm	95mm

LED DRIVER **CREE** / **bridgelux**
FULHAM / **PHILIPS** / **OSRAM**

COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K

LUMEN EFFICIENCY 120-140 LM / W

LED BEAM ANGLE 15° / 24° / 36° / 55°

CRI 90 / 95

MATERIAL ALUMINUM DIE CASTING

RING COLOUR



Easy to Dissamble and Remove



CHAMP TILTABLE



WATTAGE	3-7W	7-9W	10-12W	15-18W
DIAMETER	62MM	82MM	82MM	105MM
HEIGHT	43MM	45MM	48MM	49MM
CUTOUT	25MM	75MM	75MM	95MM

LED DRIVER **CREE** / **bridgelux**
FULHAM / **PHILIPS** / **OSRAM**

COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K


LUMEN EFFICIENCY 120-140 LM / W

LED BEAM ANGLE 15° / 24° / 36° / 55°

CRI 90 / 95

MATERIAL ALUMINUM DIE CASTING

RING COLOUR



LED Cob Lights

POP-UP




WATTAGE	8-12W	15-18W
DIAMETER	80mm	105mm
HEIGHT	90mm	110mm
CUTOUT	75mm	95mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 36°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING

WALL WASHER



WATTAGE	12W	15W
DIAMETER	85mm	85mm
HEIGHT	74mm	74mm
CUTOUT	75mm	75mm


LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 40°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 RING COLOUR  Chrome

ATOM




WATTAGE	8-10W	12-15W	18-20W
DIAMETER	68mm	83mm	90mm
HEIGHT	48mm	55mm	85mm
CUTOUT	65mm	75mm	85mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 40°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 RING COLOUR  Matt black  White



I-BALL




WATTAGE	6W	8W	12W	18W
DIAMETER	63mm	73mm	85mm	105mm
HEIGHT	42mm	51mm	57mm	73mm
CUTOUT	55mm	65mm	75mm	95mm

LED DRIVER	CREE / bridgelux FULHAM / PHILIPS / OSRAM
COLOUR TEMP	3000K / 4000K / 6500K
LUMEN EFFICIENCY	120-140 LM / W
LED BEAM ANGLE	15° / 24° / 36° / 50°
CRI	90
MATERIAL	ALUMINUM DIE CASTING
RING COLOUR	     

I - SERIES

I-SNOUT




WATTAGE	12W
DIAMETER	85mm
HEIGHT	70mm
CUTOUT	75mm
BEAM ANGLE	10°-50°




30°
ation 0 ~ 30° at
angle

I-PIN




WATTAGE	12W
DIAMETER	85mm
HEIGHT	57mm
CUTOUT	75mm
BEAM ANGLE	24°-36°



Metal Pinball, When Swinging Angle,
The Pinball Moves Up And Down With The
Gear Rolling When Popping Up To The Serrated
Concave Point, fasten The Radiator To Prevent Looseness


I-SPOT




WATTAGE	12W
DIAMETER	85mm
HEIGHT	57mm
CUTOUT	75mm
BEAM ANGLE	15°-36°



I-TRIMLESS



WATTAGE	12W
DIAMETER	108mm
HEIGHT	57mm
CUTOUT	75mm
BEAM ANGLE	10°-50°





Horizontal Rotation Of 355°,
With Positioning Point And Damping
To Fool-proof

Smart Control at a Tap.

WiFi Bluetooth

PHASE-CUT ANALOG 0-10V DALI

I - SERIES CONCEALED


I-BALL

I-PIN

I-SNOUT

I-SPOT

I-FISH EYE

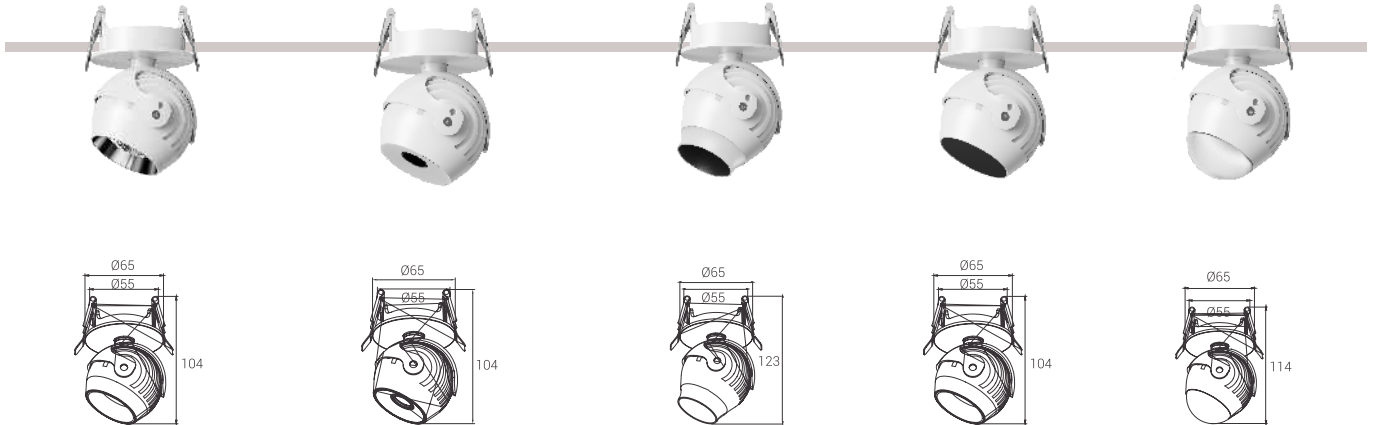

I SQUARE 12W


I-BALL

I-PIN

I-SNOUT

I-SPOT

I-FISH EYE

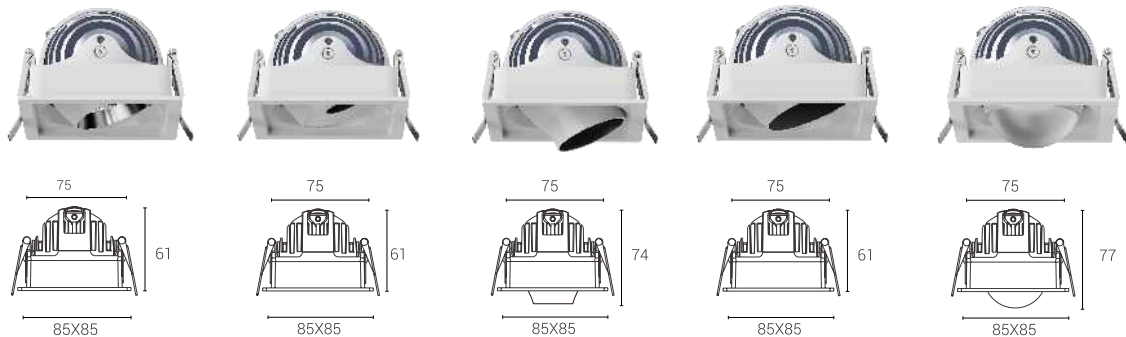

I GIMBAL 12W X 2




I-BALL

I-PIN

I-SNOUT

I-SPOT

I-FISH EYE

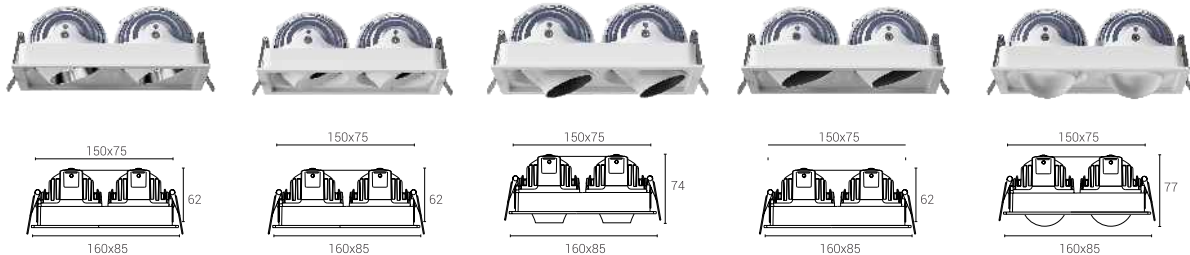



ZOOM LIGHT



WATTAGE	6-10W	15-20W	25-30W	30-40W
DIAMETER	109mm	132mm	145mm	165mm
HEIGHT	95mm	110mm	113mm	123mm
CUTOUT	100mm	125mm	136mm	145mm

LED DRIVER COLOUR TEMP LUMEN EFFICIENCY LED BEAM ANGLE CRI MATERIAL

CREE / **bridgelux**
FULHAM / **PHILIPS** / **OSRAM**
 2700K / 3000K / 4000K / 6500K
 120-140 LM / W
 36° / 60°
 90 / 95
 ALUMINUM DIE CASTING

Smart Control at a Tap.

WiFi Bluetooth

PHASE-CUT ANALOG 0-10V DALI




AQUA-IP65



WATTAGE	8-12W	15-20W	20-30W
DIAMETER	85mm	110mm	135mm
HEIGHT	70mm	78mm	91mm
CUTOUT	75mm	95mm	122mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 36° / 55°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 RING COLOUR   
Chrome Mat black White

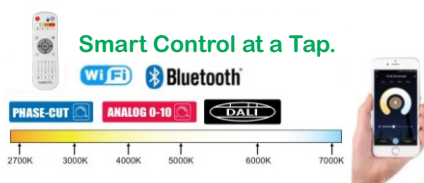



MINI



WATTAGE	12W	18W
DIAMETER	85mm	100mm
HEIGHT	52mm	60mm
CUTOUT	75mm	85mm

LED bridgelux.
manufactured by
 DRIVER **PHILIPS**
 COLOUR TEMP 3000K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 120°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 BODY COLOUR Matt-black White

Smart Control at a Tap.

Wi-Fi Bluetooth

PHASE-CUT ANALOG 0-10V DALI

NEO




WATTAGE	12W	15/18W	20/24W
DIAMETER	120mm	150mm	170mm
HEIGHT	50mm	50mm	50mm
CUTOUT	100mm	137mm	160mm

LED 
 DRIVER **PHILIPS**
 COLOUR TEMP 3000K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 120°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 RING COLOUR  

NEXA



WATTAGE	8W	12W	15/18W	24/32W
DIAMETER	90mm	120mm	170mm	225mm
HEIGHT	30mm	30mm	30mm	30mm
CUTOUT	75mm	105mm	155mm	210mm



LED 
 DRIVER **PHILIPS**
 COLOUR TEMP 3000K / 4000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 120°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING

PRO DL



WATTAGE	8W	12W	18W	24W
DIAMETER	120mm	145mm	170mm	195mm
CUT OUT	100mm	125mm	150mm	175mm

LED 
 DRIVER **PHILIPS**
 COLOUR 3000K / 4000K / 6500K
 LUMEN EFFICIENCY 100 LM / W
 MATERIAL ALUMINUM DIE CASTING



LED


Linear COB Lights

VIVID

Lightning Your Dreams




TILTABLE LINEAR COB BLADE

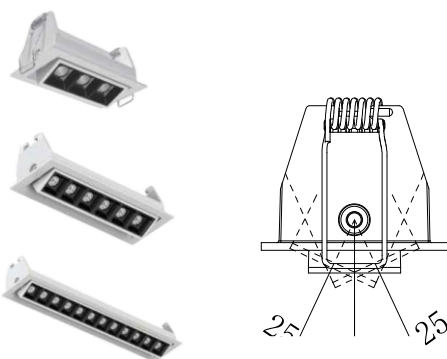

MODEL	3WAY	6WAY	12WAY
WATTAGE	6W	10W	20W
DIAMETER	84X49mm	141X49mm	255X49mm
HEIGHT	44mm	44mm	44mm
CUTOUT	78X43mm	136X43mm	250X43mm

LED
 DRIVER
 COLOUR TEMP
 LUMEN EFFICIENCY
 LED BEAM ANGLE
 REFLECTOR COLOUR
 BODY COLOUR
 MATERIAL

CREE / **bridgelux**
FULHAM / **PHILIPS** / **OSRAM**
 2700K / 3000K / 4000K / 6500K
 120-140 LM / W
 24° / 36°
 BLACK
 BLACK / WHITE
 ALUMINUM DIE CASTING



LED

Linear COB Lights

VIVID

Lightning Your Dreams

DOUBLE TILTABLE LINEAR COB BLADE



WATTAGE	20W	40W
DIAMETER	147X100mm	261X100mm
HEIGHT	44mm	44mm
CUTOUT	138X90mm	252X90mm

LED **CREE** ⇄
 DRIVER **FULHAM** | **PHILIPS** / **OSRAM** Ⓢ
 COLOUR TEMP 2700K / 3000K / 4000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 24° / 36°
 REFLECTOR COLOUR BLACK
 BODY COLOUR Matt black White
 MATERIAL ALUMINUM DIE CASTING

LINEAR PRO



WATTAGE	2W	4W	6W	10W	20W
DIAMETER	45X45mm	48X45mm	95X45mm	148X45mm	282x45mm
HEIGHT	32mm	32mm	32mm	32mm	32mm
CUTOUT	35X35mm	58X35mm	85X35mm	139X37mm	272X37mm

LED **CREE** ⇄
 DRIVER **FULHAM** | **PHILIPS** / **OSRAM** Ⓢ
 COLOUR TEMP 3000K / 4000K / 6500K
 LUMEN EFFICIENCY 100 LM / W
 LED BEAM ANGLE 36°
 REFLECTOR COLOUR BLACK / ROSE GOLD
 BODY COLOUR Matt black White
 MATERIAL ALUMINUM DIE CASTING

New 5 Way Leaser Pro Reflectors




Smart Control at a Tap.

WiFi Bluetooth

PHASE-CUT ANALOG 0-10V DALI

LED

Linear COB Lights



Lightning Your Dreams

TRIMLESS LASER BLADE



MODEL	1WAY	2WAY	5WAY	10WAY
WATTAGE	2W	4W	10W	20W
DIAMETER	91X38mm	91X69mm	141X91mm	274X91mm
HEIGHT	49mm	49mm	49mm	49mm
CUTOUT	42X41mm	72X41mm	145X41mm	277X41mm

LED DRIVER **CREE** / **bridgelux**
FULHAM / **PHILIPS** / **OSRAM**

COLOUR TEMP 3000K / 4000K / 6500K

LUMEN EFFICIENCY 120 LM / W

LED BEAM ANGLE 30°

REFLECT Matt-black
 White

BODY COL White

MATERIAL ALUMINUM DIE CASTING

LINEAR BLADE DOWN LIGHT



WATTAGE 2-3W
LED **CREE** / **bridgelux**
DRIVER **FULHAM** / **PHILIPS** / **OSRAM**

COLOUR TEMP 2700K / 3000K / 4000K / 6500K

REFLECTOR INDIAN / GR

SIZE OUTER TRIM 45 X 45mm

CUTOUT 37 X 37mm

REFLECTOR COLOUR BLACK / ROSE GOLD

WATTAGE 4-6W
LED **CREE** / **bridgelux**
DRIVER **FULHAM** / **PHILIPS** / **OSRAM**

COLOUR TEMP 2700K / 3000K / 4000K / 6500K

REFLECTOR INDIAN / GR

SIZE OUTER TRIM 75 X 45mm

CUTOUT 68 X 37mm

REFLECTOR COLOUR BLACK / ROSE GOLD

WATTAGE 10-15W
LED **CREE** / **bridgelux**
DRIVER **FULHAM** / **PHILIPS** / **OSRAM**

COLOUR TEMP 2700K / 3000K / 4000K / 6500K

REFLECTOR INDIAN / GR

SIZE OUTER TRIM 147 X 45mm

CUTOUT 140 X 37mm

REFLECTOR COLOUR BLACK / ROSE GOLD

RIO DUAL FRONT OPENABLE



WATTAGE	2X12-15W
DIAMETER	168X85X88mm
HEIGHT	70mm
CUTOUT	155X75mm

LED DRIVER **CREE** / **bridgelux**
FULHAM / **PHILIPS** / **OSRAM**


COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K

LUMEN EFFICIENCY 120-140 LM / W

LED BEAM ANGLE 40°

CRI 90 / 95

MATERIAL ALUMINUM DIE CASTING



15

+91 9032326892

LED

Linear COB Lights

VIVID

Lightning Your Dreams

GLANZA DUAL SQUARE




WATTAGE	7W X 2	12W X 2	18W X 2	25W X 2
DIAMETER	115mm X 65mm	155mm x 85mm	195mm x 105mm	195mm x 105mm
HEIGHT	85mm	111mm	124mm	135mm
CUTOUT	105mm x 55mm	145mm x 75mm	185mm x 95mm	185mm x 95mm

GLANZA DUAL SQUARE TRIMLESS





WATTAGE	7W X 2	12W X 2	18W X 2	25W X 2
DIAMETER	115mm X 65mm	155mm x 85mm	195mm x 105mm	195mm x 105mm
HEIGHT	85mm	111mm	124mm	135mm
CUTOUT	105mm x 58mm	145mm x 78mm	185mm x 98mm	185mm x 98mm




LED 
 DRIVER  /  / 
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 OPTICS HERCUUX
 LUMEN EFFICIENCY 120-140 LM / W
 RING COLOUR      
 CRI 80 / 90
 HEATSINK COLOUR GREY
 BEAM ANGLE 15° / 24° / 36° / 55°

5° AVAILABLE IN 75mm CUTOUT




Smart Control at a Tap.

  Bluetooth

2700K 3000K 4000K 5000K 6000K 7000K



12W X 1 / 12W X 2 GIMBAL DOWN LIGHT



WATTAGE	6W	12W
CUTOUT	103X103mm	103X103mm
DIAMETER	120mm	120mm
HEIGHT	77mm	77mm

WATTAGE	6X6W	12X12W
CUTOUT	103X195mm	103X195mm
DIAMETER	120X220mm	120X220mm
HEIGHT	77mm	77mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 REFLECTOR DARKOO / INDIAN
 COLOUR TEMP 2700 / 3000K / 4000K / 6500K
 LUMEN EFFICIENCY 120 - 40 LM / W
 LED BEAM ANGLE 24° / 36° / 60°
 BODY COLOUR Matt-black White

12W X 3 GIMBAL DOWN LIGHT



TRIPPLE GIMBAL

WATTAGE	6+6+6W	12+12+12W
CUTOUT	103X288mm	103X288mm
DIAMETER	120X313mm	120X313mm
HEIGHT	77mm	77mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 REFLECTOR DARKOO / INDIAN
 COLOUR TEMP 2700K / 3000K / 4000K / 6500K
 LUMEN EFFICIENCY 120 - 140 LM / W
 LED BEAM ANGLE 24° / 36° / 60°
 BODY COLOUR Matt-black White


30X3 GIMBAL DOWN LIGHT



TRIPLE GIMBAL

WATTAGE	25+25+25W	30+30+30W
CUTOUT	353X125mm	353X125mm
DIAMETER	374X136mm	374X136mm
HEIGHT	100mm	100mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 REFLECTOR DARKOO / INDIAN
 COLOUR TEMP 2700K / 3000K / 4000K / 6500K
 LUMEN EFFICIENCY 120 - 140 LM / W
 LED BEAM ANGLE 24° / 36° / 60°
 BODY COLOUR Matt-black White

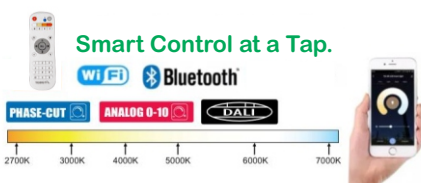

25 / 30 GIMBAL DOWN LIGHT



WATTAGE	SINGLE GIMBAL	
	25W	30W
CUTOUT	125X125mm	125X125mm
DIAMETER	136mm	136mm
HEIGHT	100mm	100mm

WATTAGE	FB DOUBLE GIMBAL	
	25+25W	30+30W
CUTOUT	125X238mm	125X238mm
DIAMETER	136X259mm	136X259mm
HEIGHT	100mm	100mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 REFLECTOR DARKOO / INDIAN
 COLOUR TEMP 2700K / 3000K / 4000K / 6500K
 LUMEN EFFICIENCY 120 - 140 LM / W
 LED BEAM ANGLE 24° / 36° / 60°
 BODY COLOUR
Matte black White

GB 25 / 30 GIMBAL DOWN LIGHT



WATTAGE	25W	30W
	HEIGHT	96mm
CUTOUT	156X156mm	156X156mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 REFLECTOR DARKOO
 COLOUR TEMP 2700K / 3000K / 4000K / 6500K
 LUMEN EFFICIENCY 130 LM / W
 LED BEAM ANGLE 24° / 36° / 60°

WATTAGE	25 + 25W	30 + 30W
	HEIGHT	98mm
CUTOUT	156X309mm	156X309mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 REFLECTOR DARKOO / INDIAN
 COLOUR TEMP 2700K / 3000K / 4000K / 6500K
 LUMEN EFFICIENCY 120 - 140 LM / W
 LED BEAM ANGLE 24° / 36° / 60°
 BODY COLOUR
White

DUKE GIMBAL



WATTAGE	7W	7X2W	7X3W	7X4W
W X L	65X65MM	65X126MM	65X187MM	126X126MM
HEIGHT	52MM	52MM	52MM	52MM
CUTOUT	55X55MM	55X115MM	55X175MM	115X115MM


WATTAGE	12W	12X2W	12X3W	12X4W	20W	20X2W
W X L	85X85MM	85X167MM	85X252MM	165X165MM	105X105MM	105X208MM
HEIGHT	63MM	63MM	63MM	63MM	77MM	77MM
CUTOUT	75X75MM	75X160MM	75X240MM	150X150MM	95X95MM	95X195MM

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 REFLECTOR GR
 LED BEAM ANGLE 24° / 40° / 60°
 COLOUR TEMP 2700K / 3000K / 4000K / 6500K
 LUMEN EFFICIENCY 130 LM / W
 BODY COLOUR
Matte black White
 RING COLOUR
Matte black

Smart Control at a Tap.

WiFi Bluetooth

PHASE-CUT ANALOG 0-10 DALI

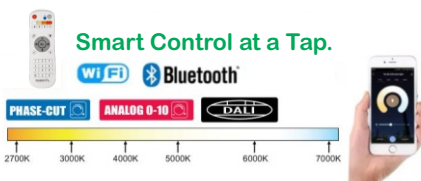



SPARK SF



WATTAGE	12/15W	24W
DIAMETER	141X34mm	273X34mm
HEIGHT	57mm	57mm

LED DRIVER **bridgelux** **FULHAM** / **PHILIPS** / **OSRAM**

COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K

MATERIAL ALUMINUM DIE CASTING

RING COLOUR Peral Shining black

Smart Control at a Tap.

Bluetooth

PHASE-CUT ANALOG 0-10V DALI

2700K 3000K 4000K 5000K 6000K 7000K

LED

Surface Lights

VIVID

Lightning Your Dreams

GLORIA SF



WATTAGE	8W	12W	18W
DIAMETER	60mm	75mm	90mm
HEIGHT	70mm	85mm	100mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 36°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 RING COLOUR  

GLORIA PRO SF



WATTAGE	8W	12W
DIAMETER	60mm	75mm
HEIGHT	70mm	85mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 36°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 RING COLOUR  



PASSION SF






WATTAGE	15W	36W
DIAMETER	80X80mm	120X120mm
HEIGHT	55mm	55mm


LED **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 MATERIAL ALUMINUM DIE CASTING
 RING COLOUR 

Smart Control at a Tap.



  Bluetooth

2700K 3000K 4000K 5000K 6000K 7000K



20

  +91 9032326892

SQUARE SF



MODEL NO
WATTAGE
DIAMETER
HEIGHT

SQ12	SQ 12 X 2	SQ 12 X 3
12W	12W X 2	12W X 3
74 X 74mm	74 X 143mm	74 X 213mm
95mm	95mm	95mm

LED

DRIVER

COLOUR TEMP








LUMEN EFFICIENCY

LED BEAM ANGLE

RING COLOUR

BODY COLOUR

LUMINARIES MATERIAL ALUMINIUM

 / 
 /  / 
 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 120 - 140 LM / W
 40°



GLORIA SF



WATTAGE	7W	7W	12W	15-24W	24W	30 - 40W
DIAMETER	50mm	50mm	70mm	70mm	93mm	93mm
HEIGHT	80mm	105mm	110mm	150mm	150mm	180mm

WATTAGE	25-30W	30 - 40W	40 - 50W
DIAMETER	115mm	115mm	115mm
HEIGHT	150mm	180mm	200mm

LED

DRIVER

COLOUR TEMP

LUMEN EFFICIENCY

REFLECTOR

RING COLOUR


BODY COLOUR

MATERIAL

 / 
 /  / 
 2700 / 3000K / 4000K / 6500 K
 120-140 LM / W
 INDIAN / GR



MOON SF

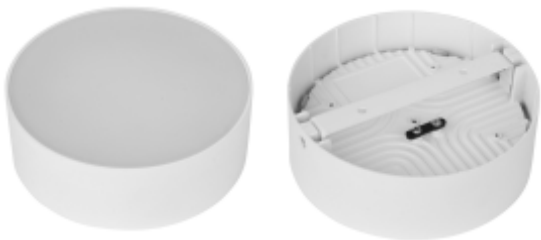

WATTAGE
DIAMETER
HEIGHT

12W	15W	18W	22W	24-28W
140mm	140mm	140mm	140MM	170MM
50mm	50mm	50mm	50MM	50MM

LED

DRIVER




COLOUR




LUMEN EFFICIENCY

MATERIAL


 / 
 /  / 
 3000K / 4000K / 6500K
 100 LM / W
 ALUMINIUM DIE CASTING

Smart Control at a Tap.

2700K 3000K 4000K 5000K 6000K 7000K



LED

COB Focus Lights

VIVID

Lightning Your Dreams

MOVABLE ZOOM SF



WATTAGE	12-15W
DIAMETER	100mm
HEIGHT	100mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 36°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 BODY COLOUR Matt-black White

TWIST SF



WATTAGE	12-15W
DIAMETER	55mm
HEIGHT	160mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 36°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 BODY COLOUR Matt-black White

JUPITER SF



WATTAGE	8W	12W
DIAMETER	65mm	85mm
HEIGHT	80mm	90mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 36°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 RING COLOUR White Black Chrome Silver Back Rose Gold Gold
 BODY COLOUR Matt-black White

Smart Control at a Tap.

WiFi Bluetooth

PHASE-CUT ANALOG 0-10V DALI


LED

COB Focus Lights

VIVID

Lightning Your Dreams

ORIO SF

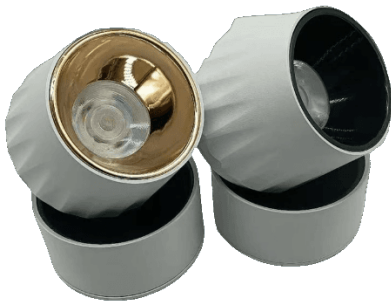

WATTAGE	12-15W
DIAMETER	75mm
HEIGHT	120mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 36°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 RING COLOUR  



STAR



WATTAGE	15-20W	30W	40W
DIAMETER	85mm	85mm	110mm
HEIGHT	130mm	160mm	160mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 24°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 BODY COLOUR  

Matt-black White


RHOMBUS



WATTAGE	10W	20W	30W
DIAMETER	70mm	90mm	90mm
HEIGHT	116mm	116mm	130mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 24°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 BODY COLOUR  

Matt-black White



LED

COB Track Lights

VIVID

Lightning Your Dreams



STAR TRACK



WATTAGE	15-20W	30W	40W
DIAMETER	85mm	85mm	110mm
HEIGHT	130mm	160mm	160mm

LED DRIVER COLOUR TEMP LUMEN EFFICIENCY LED BEAM ANGLE CRI MATERIAL BODY COLOUR

CREE / **bridgelux**
FULHAM / **PHILIPS** / **OSRAM**

2700K / 3000K / 3500K / 4000K / 5000K / 6500K


120-140 LM / W

24°

90 / 95

ALUMINUM DIE CASTING

Mat-black White

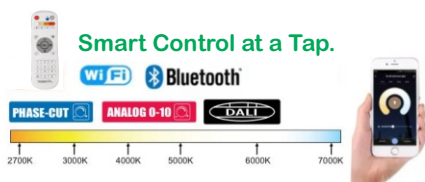

24

+91 9032326892

LED

COB Track Lights

VIVID

Lightning Your Dreams

RHOMBUS TRACK



WATTAGE	10W	20W	30W
DIAMETER	70mm	90mm	90mm
HEIGHT	116mm	116mm	130mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 24°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 BODY COLOUR Matt black White

TILTABLE TRACK



WATTAGE	10W	20W	30W
DIAMETER	100mm	110mm	115mm
HEIGHT	80mm	95mm	110mm

LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 24°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 BODY COLOUR Matt-black White

DELTA PRO TRACK



WATTAGE	10-18W	20-30W	40-50W
DIAMETER	63mm	87mm	105mm
HEIGHT	162mm	180mm	185mm


LED **CREE** / **bridgelux**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 COLOUR TEMP 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 36° / 60°
 CRI 90 / 95
 MATERIAL ALUMINUM DIE CASTING
 RING COLOUR Matt-black White



25

+91 9032326892




MODEL NO HL 5275
 INSTALLATION RECESSED / ARMSTRONG CELLING
 WATTAGE 36W / 50W / 60W
 DIMENSIONS 1195X145.0X81mm HT
 DIFFUSER PMMA
 LED 
 DRIVER **FULHAM** / **PHILIPS**
 LUMENS CC100 Lm/W, CV80 Lm/W
 COLOUR TEMP 3000K / 4000K / 6500K
 IP RATING IP 20
 MATERIAL ALLUMINUM
 RANGE 2FT / 4FT / 8FT





MODEL NO HL 5035 (50mm)
 INSTALLATION SUSPENDED / SURFACE MOUNTED
 WATTAGE 30W / 40W / 50W
 DIMENSIONS 1180X50.0X80mm HT
 DIFFUSER PMMA
 LED 
 DRIVER **FULHAM** / **PHILIPS**
 LUMENS CC100 Lm/W, CV80 Lm/W
 COLOUR TEMP 3000K / 4000K / 6500K
 IP RATING IP 20
 MATERIAL ALUMINUM
 RANGE 2FT / 4FT / 8FT







MODEL NO HL 7070 (70mm)
 INSTALLATION SUSPENDED / SURF ACE MOUNTED
 WATTAGE 30W / 40W / 50W
 DIMENSIONS 1180X50.0X80mm HT
 DIFFUSER PMMA
 LED 
 DRIVER **FULHAM** / **PHILIPS**
 LUMENS CC100 Lm/W, CV80 Lm/W
 COLOUR TEMP 3000K / 4000K / 6500K
 IP RATING IP 20
 MATERIAL ALLUMINUM
 RANGE 2FT / 4FT / 8FT




Smart Control at a Tap.



Blade & Linear Profile Combination





THESE ARE THE 4 EXTENSIONS AVAILABLE

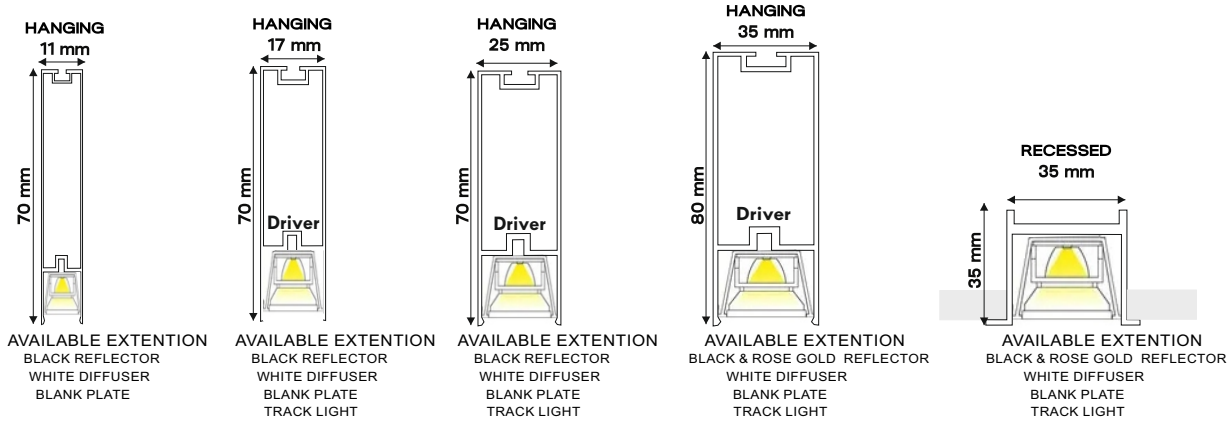

WIDTH	HEIGHT	CUT DIA	LENGTH
11 MM	70 MM		2440 MM
17 MM	70 MM		2440 MM
25 MM	70 MM		2440 MM
35 MM	80 MM		3600 MM
45 MM	35 MM	35 MM	3600 MM

- Features:-
- Thinnest customizable linear profile light
 - It can be suspended and surface mounted
 - Available in 11 mm to 35 mm Spread
 - Option to play around with number of extensions like Linear spot, Track spot, Diffused light
 - Can be customized in any size And also available in square & rectangle shapes.

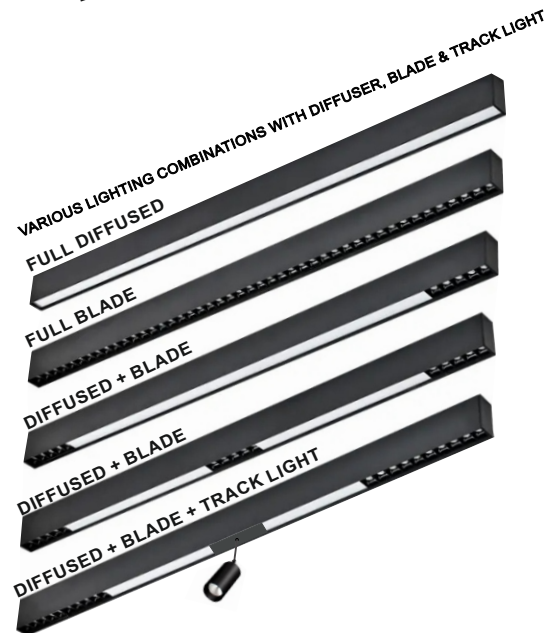

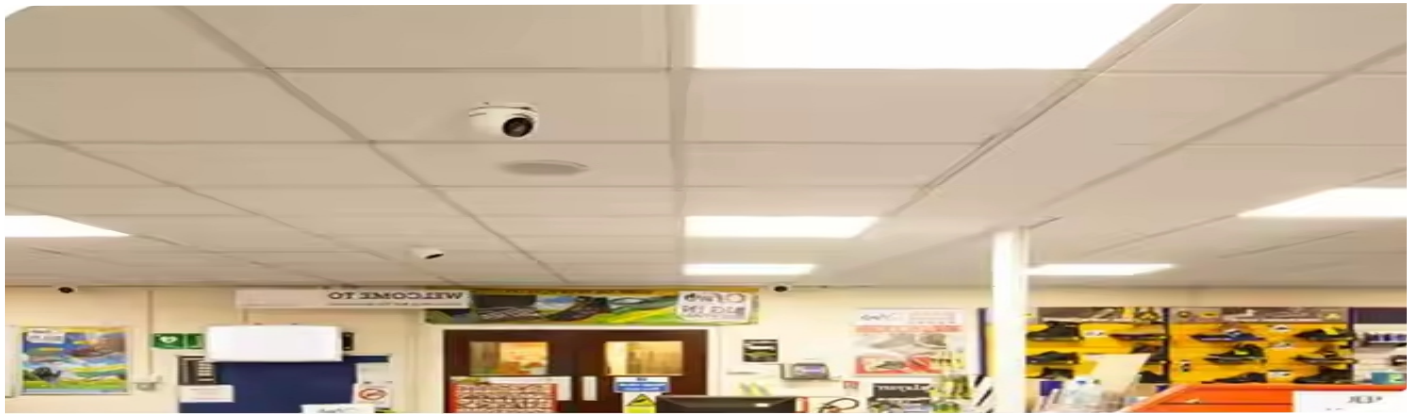

2X2 LED PANEL




WATTAGE	36W / 40W / 45W
LED DRIVER	bridgelux. FULHAM / PHILIPS
LUMENS	100 Lm / W
COLOUR TEMP	3000K / 4000K / 6500K
IP RATING	IP 20

LED

Strip Light & SMPS


VIVID

Lightning Your Dreams

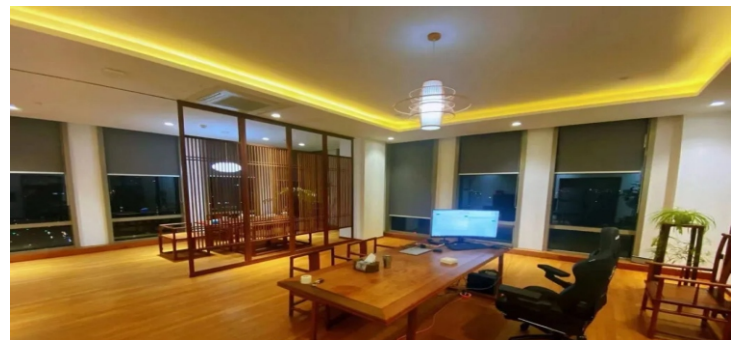

STRIP LIGHT



LED QTY	STRIP WIDTH	CCT	Output
120 PER MTR	8mm	3K, 4K, 6K	12V
120 PER MTR	8mm	BLUE, RED, GREEN, PINK, ICEBLUE	12V
120 PER MTR	5mm	3K, 4K, 6K	12V
180 PER MTR	8mm	3K, 4K, 6K	12V/24V
180 PER MTR	5mm	3K, 4K, 6K	12V
240 PER MTR	10mm	3K, 4K, 6K	12V
240 PER MTR	10mm	3K, 4K, 6K	24V
216 PER MTR	10mm	CCT TUNABLE 2700K TO 6500K 	24V


SMPS 12V/24V




POWER	Output
60W	12V/24V
120W	12V/24V
150W	12V/24V
200W	12V/24V
300W	12V/24V
400W	12V/24V



5035 SF




Model : 5035 SF

Length	Body Color	Dimension
3 MTR	ANODIZED	

CORNER 1616




Model : CORNER 1616

Length	Body Color	Dimension
2 MTR	ANODIZED	

5035 CON




Model : 5035 CON

Length	Body Color	Dimension
3 MTR	ANODIZED	


7535 SF




Model : 7535 SF

Length	Body Color	Dimension
3 MTR	ANODIZED	

5050 SF




Model : 5050SF

Length	Body Color	Dimension
3 MTR	ANODIZED	

7535 CON




Model : 7535 CON

Length	Body Color	Dimension
3 MTR	ANODIZED	


5MM SF




Model : 5MM SF

Length	Body Color	Dimension
2 MTR	ANODIZED	

17MM SF




Model : 17MM SF

Length	Body Color	Dimension
2 MTR/3 MTR	ANODIZED	

5MM CON




Model : 5MM CON

Length	Body Color	Dimension
2 MTR	ANODIZED	

17MM CON




Model : 17MM CON

Length	Body Color	Dimension
2 MTR/3 MTR	ANODIZED	

10MM SF




Model : 10MM SF

Length	Body Color	Dimension
2 MTR	ANODIZED	

17MM DIP SF




Model : 17MM DIP SF

Length	Body Color	Dimension
3 MTR	ANODIZED	


10MM CON




Model : 10MM CON

Length	Body Color	Dimension
2 MTR	ANODIZED	


3535MM SF




Model : 3535MM SF

Length	Body Color	Dimension
3 MTR	ANODIZED	

25MM SF




Model : 25MM SF

Length	Body Color	Dimension
2 MTR	ANODIZED	

3535MM CON




Model : 3535MM CON

Length	Body Color	Dimension
3 MTR	ANODIZED	

25MM CON



Model : 25MM CON


Length	Body Color	Dimension
2 MTR	ANODIZED	

LED

Silicon Neon Profile Tubes


VIVID

Lightning Your Dreams

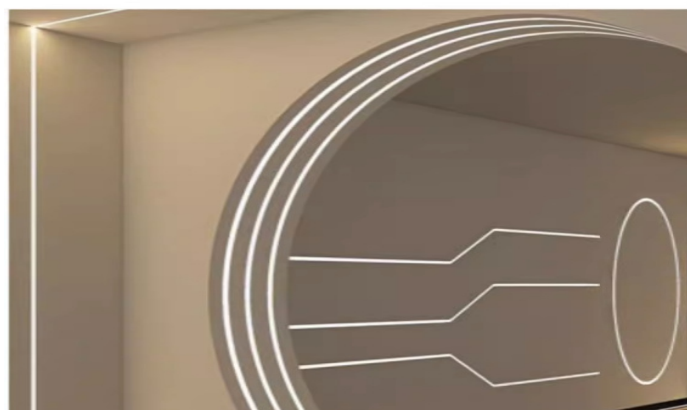

LED

Silicon Neon Blank Tubes



Lightning Your Dreams

SILICON NEON TUBES RECESSED

Model: SVT-SILICON-SF-FB-0808A Size : Lx8x8mm PCB : 5mm	Model: SVT-SILICON-SF-FB-1010A Size : Lx10x10mm PCB : 5-8mm	Model: SVT-SILICON-SF-FB-1210A Size : Lx12x10mm PCB : 5-8mm

Model: SVT-SILICON-SF-FB-1510A Size : Lx15x10mm PCB : 8-12mm	Model: SVT-SILICON-SF-FB-1616A Size : Lx16x16mm PCB : 8-12mm	Model: SVT-SILICON-SF-FB-2010A Size : Lx20x10mm PCB : 8-12mm	Model: SVT-SILICON-SF-FB-2510A Size : Lx25x10mm PCB : 8-10mm x 2	Model: SVT-SILICON-SF-FB-3020A Size : Lx30x20mm PCB : 8-12mm x 2	Model: SVT-SILICON-SF-FB-5020A Size : Lx50x20mm PCB : 8-10mm x 2

SILICON NEON TUBES SURFACE

Model: SVT-SILICON-SF-FB-0808 Size : Lx8x8mm PCB : 6mm Type : Front Bend	Model: SVT-SILICON-SF-FB-1010 Size : Lx10x10mm PCB : 6mm Type : Front Bend	Model: SVT-SILICON-SF-FB-1212 Size : Lx12x12mm PCB : 8mm Type : Front Bend	Model: SVT-SILICON-SF-FB-1510 Size : Lx15x10mm PCB : 10mm Type : Front Bend


Model: SVT-SILICON-SF-FB-1616 Size : Lx16x16mm PCB : 10mm Type : Front Bend	Model: SVT-SILICON-SF-FB-2010 Size : Lx20x10mm PCB : 12mm Type : Front Bend	Model: SVT-SILICON-SF-FB-2020 Size : Lx20x20mm PCB : 12mm Type : Front Bend	Model: SVT-SILICON-SF-FB-3020 Size : Lx30x20mm PCB : 12mm Type : Front Bend	Model: SVT-SILICON-SF-FB-5020 Size : Lx50x20mm PCB : 8-10mm x 2 Type : Front Bend	Model: SVT-SILICON-SF-RD-16 Size : Lx16Φ PCB : 6mm Type : Front Bend

LED

Ultra Thin Magnetic Track Lights


VIVID

Lightning Your Dreams

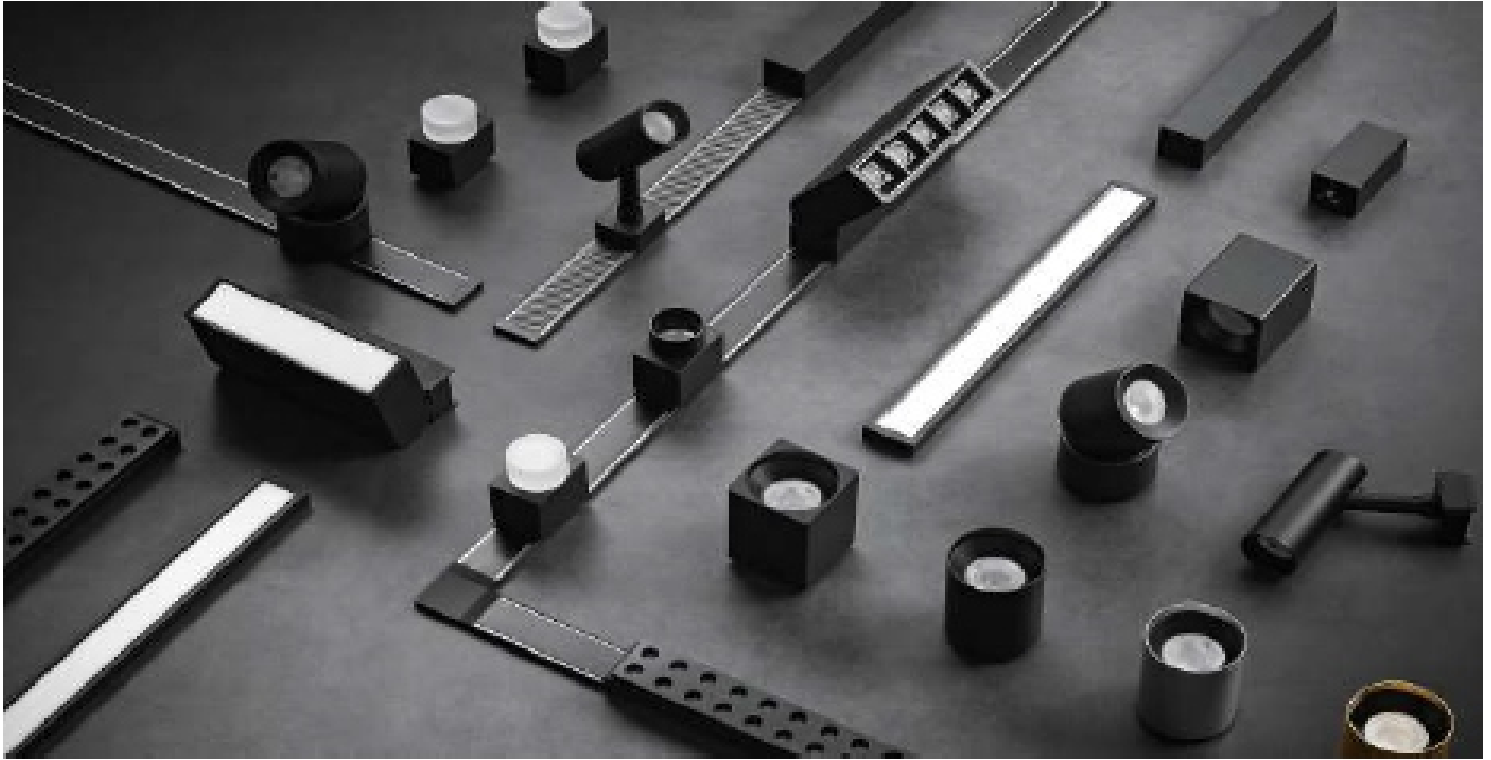

LED

Ultra Thin Magnetic Track Lights



VIVID

Lightning Your Dreams

LINEAR DIFFUSED



WATTAGE	12W	24W
OUTER SIZE	L300XW32XH11	L600XW32XH11

INPUT VOLT 48V
COLOUR TEMP 2700K - 6500K
LED BEAM ANGLE 105°
MATERIAL ALUMINUM

LINEAR GRILL



WATTAGE	10W
OUTER SIZE	L240XW32XH11

INPUT VOLT 48V
COLOUR TEMP 2700K - 6500K
LED BEAM ANGLE 30°
MATERIAL ALUMINUM

SPOT ADJUSTABLE



WATTAGE	10W
OUTER SIZE	L140XW30XH105

INPUT VOLT 48V
COLOUR TEMP 2700K - 6500K
LED BEAM ANGLE 30°
MATERIAL ALUMINUM

TRACK LIGHT



WATTAGE	7W	12W
OUTER SIZE	D30XH145	D48XH150

INPUT VOLT 48V
COLOUR TEMP 2700K - 6500K
LED BEAM ANGLE 24°
MATERIAL ALUMINUM

LED

Ultra Thin Magnetic Track Lights

VIVID

Lightning Your Dreams

CYLINDER



WATTAGE	7W
OUTER SIZE	D54XH75

INPUT VOLT	48V
COLOUR TEMP	2700K - 6500K
LED BEAM ANGLE	24°
MATERIAL	ALUMINUM

CYLINDER ROTATABLE



WATTAGE	7W
OUTER SIZE	D54XH98

INPUT VOLT	48V
COLOUR TEMP	2700K - 6500K
LED BEAM ANGLE	24°
MATERIAL	ALUMINUM

SINGLE SPOT



WATTAGE	6W
OUTER SIZE	L48XW35XH60

INPUT VOLT	48V
COLOUR TEMP	2700K - 6500K
LED BEAM ANGLE	30°
MATERIAL	ALUMINUM

ARC



WATTAGE	6W
OUTER SIZE	L48XW35XH60

INPUT VOLT	48V
COLOUR TEMP	2700K - 6500K
LED BEAM ANGLE	160°
MATERIAL	ALUMINUM




LED

Ultra Thin Magnetic Track Lights

VIVID

Lightning Your Dreams

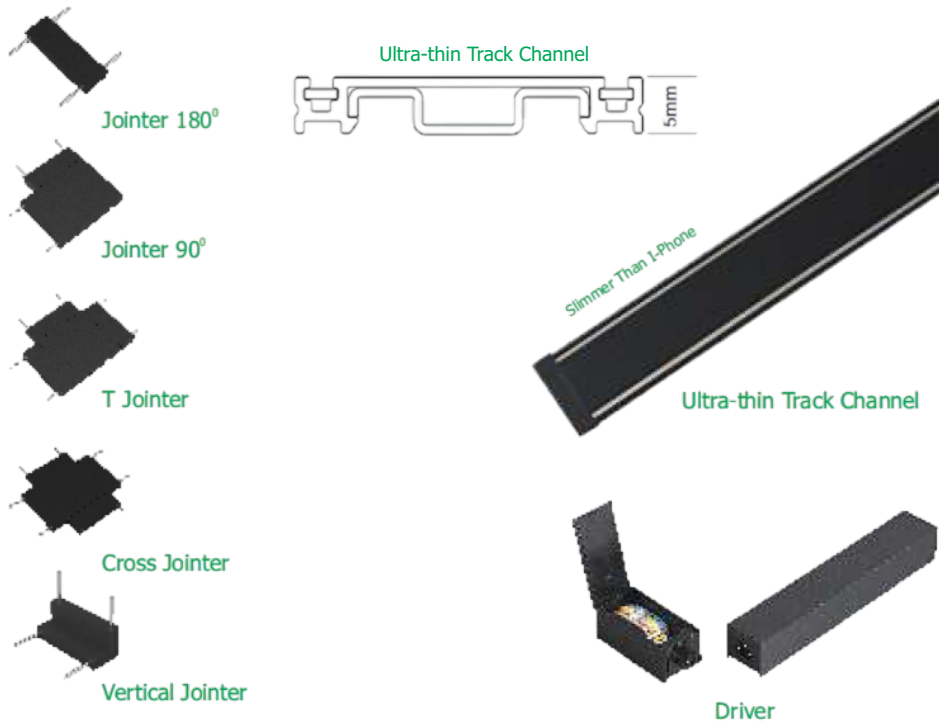

LED

Magnetic Track Lights

VIVID

Lightning Your Dreams



LED

Magnetic Track Lights

VIVID

Lightning Your Dreams

TRACK LIGHT



WATTAGE	12W	24W
SIZE	D50XH180	D60XH200

INPUT VOLT	48V
COLOUR TEMP	2700K - 6500K
LED BEAM ANGLE	24°
MATERIAL	ALUMINUM



HANGING



WATTAGE	12W MINI	12W
SIZE	D55XH165	D55XH300

INPUT VOLT	48V
COLOUR TEMP	2700K - 6500K
LED BEAM ANGLE	24°
MATERIAL	ALUMINUM

CHAMP TILTABLE

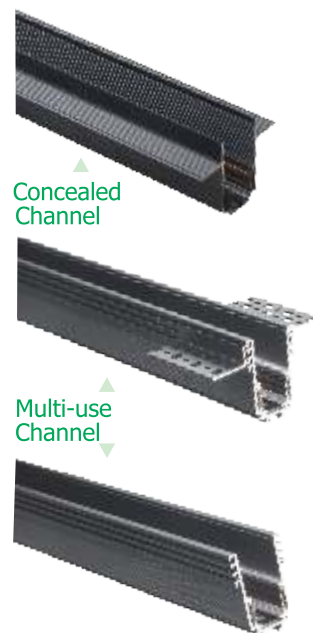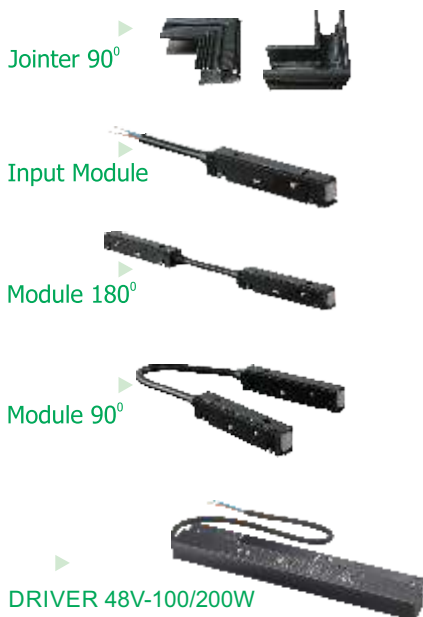

AVAILABLE IN 1,2,3 MTR LENGHTS



LINEAR SPOT



WATTAGE	6W	12W	18W	24W
SIZE	L113XW22XH43	L220XW22XH43	L328XW22XH43	L435XW22XH43

INPUT VOLT 48V
 COLOUR TEMP 2700K - 6500K
 LED BEAM ANGLE 24°
 MATERIAL ALUMINUM

SPOT ADJUSTABLE



WATTAGE	6W	12W	18W
SIZE	L120XW22XH85	L228XW22XH85	L334XW22XH85

INPUT VOLT 48V
 COLOUR TEMP 2700K - 6500K
 LED BEAM ANGLE 24°
 MATERIAL ALUMINUM

LINEAR DIFFUSED



WATTAGE	12W	24W
SIZE	L300XW22XH43	L600XW22XH43

INPUT VOLT 48V
 COLOUR TEMP 2700K - 6500K
 MATERIAL ALUMINUM

CORNER DIFFUSED



WATTAGE	24W
OUTER SIZE	L300XW22XH43

INPUT VOLT 48V
 COLOUR TEMP 2700K - 6500K
 MATERIAL ALUMINUM

LED


Wall Elevation/Step Lights

VIVID

Lightning Your Dreams




2 WAY LENS



WATTAGE	2X2W
OUTER SIZE	75X75X50

INPUT VOLT	90-265V
COLOUR TEMP	2700K - 6500K
MATERIAL	ALUMINUM
IP RATING	IP 65


4 WAY LENS



WATTAGE	4X4W
OUTER SIZE	75X75X50


INPUT VOLT	90-265V
COLOUR TEMP	2700K - 6500K
MATERIAL	ALUMINUM
IP RATING	IP 65

UP-DOWN LIGHT



WATTAGE	2X2W
OUTER SIZE	140X85X40

INPUT VOLT	90-265V
COLOUR TEMP	2700K - 6500K
MATERIAL	ALUMINUM
IP RATING	IP 65



WATTAGE	4W
OUTER SIZE	180X85X40

INPUT VOLT	90-265V
COLOUR TEMP	2700K - 6500K
MATERIAL	ALUMINUM
IP RATING	IP 65

LED

Wall Elevation/Step Lights

VIVID

Lightning Your Dreams



K-LIGHT




WATTAGE	3W 1 WAY	6W 2 WAY
SIZE	80X80X65	145X80X65

INPUT VOLT	90-265V
COLOUR TEMP	2700K - 6500K
MATERIAL	ALUMINUM
IP RATING	IP 65



STEP LIGHT

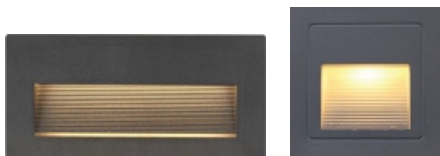

WATTAGE	3W	6W
OUTER SIZE	85X85X50	145X70X55
CUT OUT SIZE	67X67	135X135

INPUT VOLT	90-265V
COLOUR TEMP	2700K - 6500K
MATERIAL	ALUMINUM
IP RATING	IP 65



SPIKE LIGHT



WATTAGE	5-7W	10-12W	15-20W
SIZE	55X90	60X80	80X110

INPUT VOLT 90-265V
 COLOUR TEMP 2700K - 6500K
 MATERIAL ALUMINUM
 IP RATING IP 65

5W Available in Red, Green, Blue & Pink



WATTAGE 120W - 150W / 180W - 250W
 LED TYPE SMD HIGH / MID POWER
 LED **CREE** / **bridgelux** / **OSRAM**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 MATERIAL ALUMINUM DIECASTING
 COLOUR TEMP 3000K / 4000K / 6500K
 IP RATING IP 65



WATTAGE 30W - 50W / 75W - 100W
 LED TYPE SMD HIGH / MID POWER
 LED **CREE** / **bridgelux** / **OSRAM**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 MATERIAL ALUMINUM DIECASTING
 COLOUR TEMP 3000K / 4000K / 6500K
 IP RATING IP 65



WATTAGE 100W - 150W / 175W - 250W
 LED TYPE SMD HIGH / MID POWER
 LED **CREE** / **bridgelux** / **OSRAM**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 MATERIAL ALUMINUM DIECASTING
 COLOUR TEMP 3000K / 4000K / 6500K
 IP RATING IP 65



WATTAGE 30-250W
 LED TYPE SMD HIGH / MID POWER
 LED **CREE** / **bridgelux** / **OSRAM**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 MATERIAL ALUMINUM DIECASTING
 COLOUR TEMP 3000K / 4000K / 6500K
 IP RATING IP 65



WATTAGE 30-250W
 LED TYPE SMD HIGH / MID POWER
 LED **CREE** / **bridgelux** / **OSRAM**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 MATERIAL ALUMINUM DIECASTING
 COLOUR TEMP 3000K / 4000K / 6500K
 IP RATING IP 65



WATTAGE 100-400W
 LED TYPE SMD HIGH / MID POWER
 LED **CREE** / **bridgelux** / **OSRAM**
 DRIVER **FULHAM** / **PHILIPS** / **OSRAM**
 MATERIAL ALUMINUM DIECASTING
 COLOUR TEMP 3000K / 4000K / 6500K
 IP RATING IP 65



LENS




WATTAGE	24-150W
LED TYPE	SMD HIGH / MID POWER
LED	bridgelux / OSRAM
DRIVER	PHILIPS / OSRAM
MATERIAL	ALUMINUM DIECASTING
COLOUR TEMP	3000K / 4000K / 6500K
IP RATING	IP 65

ROCKET




WATTAGE	18-90W
LED TYPE	SMD HIGH / MID POWER
LED	bridgelux / OSRAM
DRIVER	PHILIPS / OSRAM
MATERIAL	ALUMINUM DIECASTING
COLOUR TEMP	3000K / 4000K / 6500K
IP RATING	IP 65

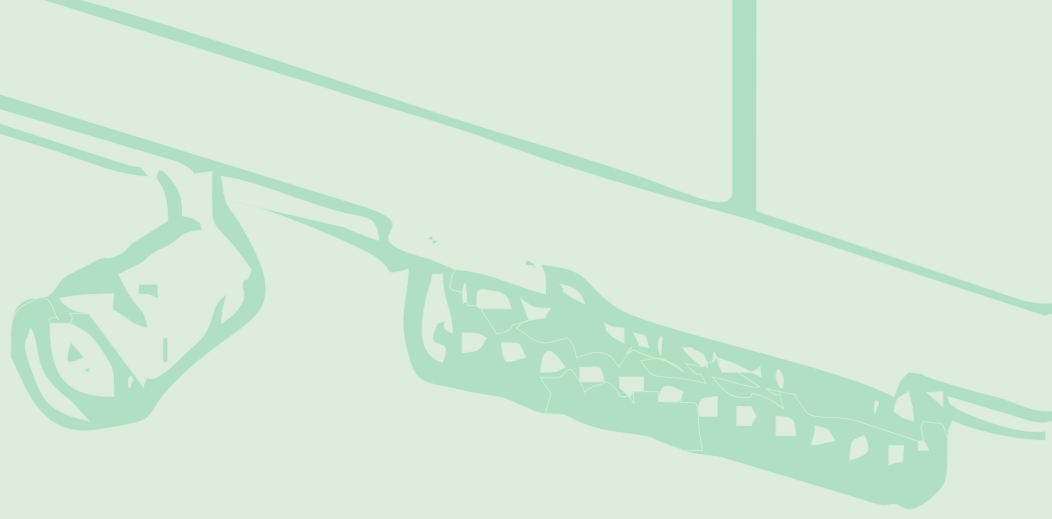

Lightning Your Dreams

Office:

#24, Sri Lakshmi Nagar, Mansoorabad, LB Nagar Hyd- 68

 +91 9032326892

: infovividled@gmail.com   [vividledsolutions](#)